




Users (3 - 12 years): 4
Required surface: 34 m²
Assembly time by 2 pers.: 6 h


Shock-absorbing properties of playground area surface should comply with EN-1176 (e.g. rubber, mulch, sand, grass, gravel rated for a fall height ≥ 1.5 m)

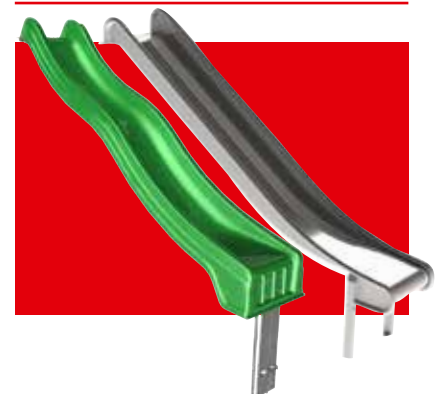

Hy-Slide Green / Hy-Slide Steel



 **390 x 160 x 320 cm**



The cut to size woodkit is manufactured from PEFC certified North-European spruce timber and high pressure impregnated.

Cross sections in woodkit :

Posts : 110 x 110 mm

Joists : 44 x 68 mm

Boards : 19 x 144 mm

Rebated boards : 19 x 145 mm

Kits: 1x P - Kit A 1x P - Kit C

Hy-Slide: 1

Timber package: 1

Item number: 171500101

EAN: 8711546140564

Packaging dimensions (W x D x H): 305 x 120 x 38 cm

Weight: 276 kg

Optional for non-paved construction site

Number of Anchor Sets Uni (2 pcs): 2 sets

Concrete: 90 liter (≈180 kg)

For paved construction sites additional anchoring hardware is required: e.g. chemical anchors, expanding plugs/bolts



18ο χλμ. Ν.Ε.Ο.Α.Κ
Τηλ. 210-5573739

Hy-land B.V.
P.O. Box 75083
NL 1070 AB Amsterdam
The Netherlands
info@hy-land.eu